





Key Features

- USB capture video complying with UVC for live streaming
- 4CH HDMI inputs
- 2" TFT display on board to Live preview four input
- Auto cut and manual switch (T-Bar)
- 14 transition effects on T-Bar
- Support PIP (Picture-In-Picture)
- Audio offers embedded or external source to select
- Support switch between 6-Picture PVW and PGM to HDMI Out
- Support DSK
- Support PTZ camera control
- Control by PC or mobile phone (via APP)
- Compact design

Application Diagram

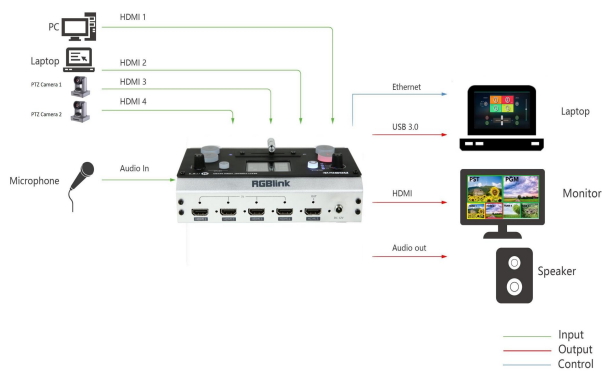

Dimensions

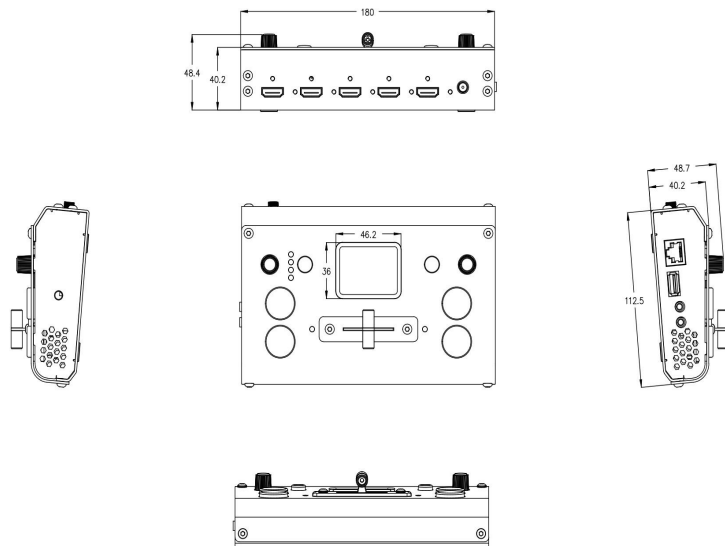

Order Codes

Product Code	Item
230-0001-02-0	mini+

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice

RGBlink®

www.rgblink.com



Specification

Connectors	Input	HMDI In	4×HMDI-A
	Output	HDMI Out	1×HMDI-A
		USB 3.0	1×USB TypeA
	Audio	In	1×3.5mm Stereo Jack
		Out	1×3.5mm Stereo Jack
Performance	Communication	LAN	1×RJ45
	Power	1×DC Jack	
	Input Resolutions	HDMI	
		SMPTE	720p@50/60 1080i@50 1080p@23/24/30/50/60
		VESA	1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1600×1200@60 1680×1050@60 1920×1080@60
			1920×1200@60
	Output Resolutions	Choose standard	
		HDMI	
		SMPTE	720p@60 1080p@60
		VESA	1024×768@60 1280×720@60 1280×768 1280×1024@60 1360×768@60 1600×1200@60 1920×1080@60 1920×1200@60
		Streaming	1280×720@60 1920×1080@60
Power	Supported Standards	HDMI	1.3
		USB	3.0
Environment	Input Voltage	DC 12V/1.5A	
	Max Power	18W	
Physical	Temperature	-0℃～70℃	
		Humidity	
	Weight	Net	0.5kg
		Packaged	0.9kg
	Dimension	Net	180mm×112.5mm×48.7mm
		Packaged	271.6mm×178.6mm×83.5mm 40pcs/610mm×570mm×395 mm CTN

